

UCCONNECT®

Keystone Jack, Cat.6A, RJ45, FTP, 180°, Tool Free, Shielded




10G Cat6A FTP Tool Free Keystone Jack

- Category 6A Compliant
- 3rd Party Approved
- Dual T568A & T568B wiring
- Zinc Alloy housing provides 100% EMC and Alien cross talk protection
- Compatible with FTP cables from 26 AWG to 22 AWG
- RoHS compliant
- Re-termination: 10 cycles (minimum)

Specification

Item	
Compatibility	22-26 AWG FTP cables
Dimensions	36.95mm x 24.5mm x 16.94mm
IDC cap colour code supports both wiring schemes	TIA 568A & 568B
Electrical Performance	
Insulation resistance	≥ 500 MΩ
Contact resistance	≤ 20 mΩ
Dielectric withstanding voltage, contact-contact	≥ 1000 V DC
Dielectric withstanding voltage, contact-shell	≥ 1500 V DC
Current rating	1 A at 50 °C
Mechanical Performance	
Plug insertion Life	≥ 750 times
Insertion force	≤ 30 N
Temperature rating	-40 to 66 °C
Contact plating	50 u'' gold plating over contact area

Construction

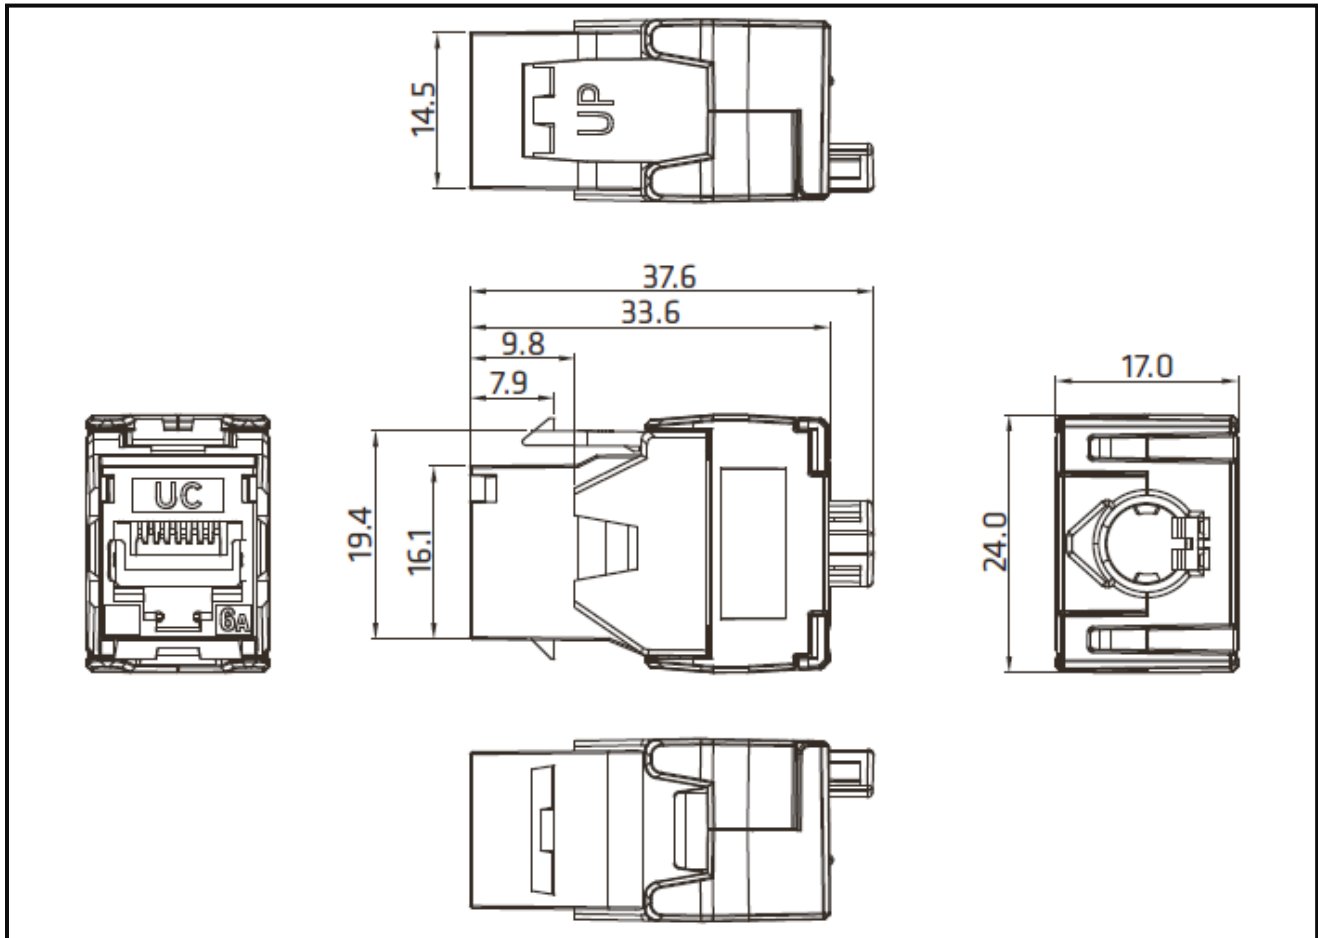

Ordering Information

SAP1C	UC PN	Material Description	Description Code	Weight	Items per Packaging Unit
YMJBP01851	MJTF1271	Keystone Jack, Cat.6a, RJ45, FTP, 180°, Tool Free, Shielded	UC C500 MJ TF S V6	20g	1
Related Products					
YPPBP00343	PPS9748	19" 1U 24P FTP Keystone Panel, Empty, Cat 5e / 6 / 6a, 180°	UC CACC PP S BK 24 1U	585g	1
YPPBP00346	PPVS9752	19" 1U 24P FTP Angled Keystone Panel, Empty, 180°, Foldable patented	UC CACC PP VP S BK 24 1U	585g	1
YPPBP00347	PPS9772	19" 2U 48P FTP Keystone Panel, Empty, 180°	UC CACC PP S BK 48 1U	720g	1

Enquiries

Please contact our local sales office or mms.asia@prysmiangroup.com

Multimedia Solutions is the data communication portfolio of Prysmian Group and comprises all the necessary portfolio of cable solutions for data communication.

Ask about UC CONNECT for a complete Structure Cabling Solutions with 25 Years System Warranty.

Visit www.DrakaUC.com for more information.

© PRYSMIAN GROUP 2019, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.